

This map is based upon Ordnance Survey material with the permission of Ordnance Survey on behalf of the Controller of Her Majesty's Stationery Office. © Crown Copyright 2012. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings. © Dorset County Council. EA 100019799, 2012. THIS MAP IS NOT DEFINITIVE

# SP7 STANDPIPE

# OVVAL

STAINLESS

## NON CONCUSSIVE STANDPIPE

Manufactured in marine grade 316L stainless steel, in either a mirror polish or satin brushed finish.

This offers the ultimate in corrosion protection for salty or poolside environments.

Conforming to strict WRAS standards the SP7 is the best choice for a safe and secure water supply.

A thick wall, 3mm box section, stainless steel body offers high strength.

Vandal resistant pin drive security catches, or padlock loops, ensure security.

Top quality Bristan non concussive bib tap, with optional flow restriction for water economy.

Dog foul shielding cover to prevent contamination.

Internal systems comply with strict WRAS standards with thick Armaflex lagging.


Drain off tap for long term very cold conditions.

An essential requirement for "Blue Flag" beaches!  
Designed for permanent mains connection at over 700mm below ground level.

Fully welded construction, lid and covers, with no visible fasteners and extra strong hinge for ultimate vandal resistance.




Proudly manufactured in England !

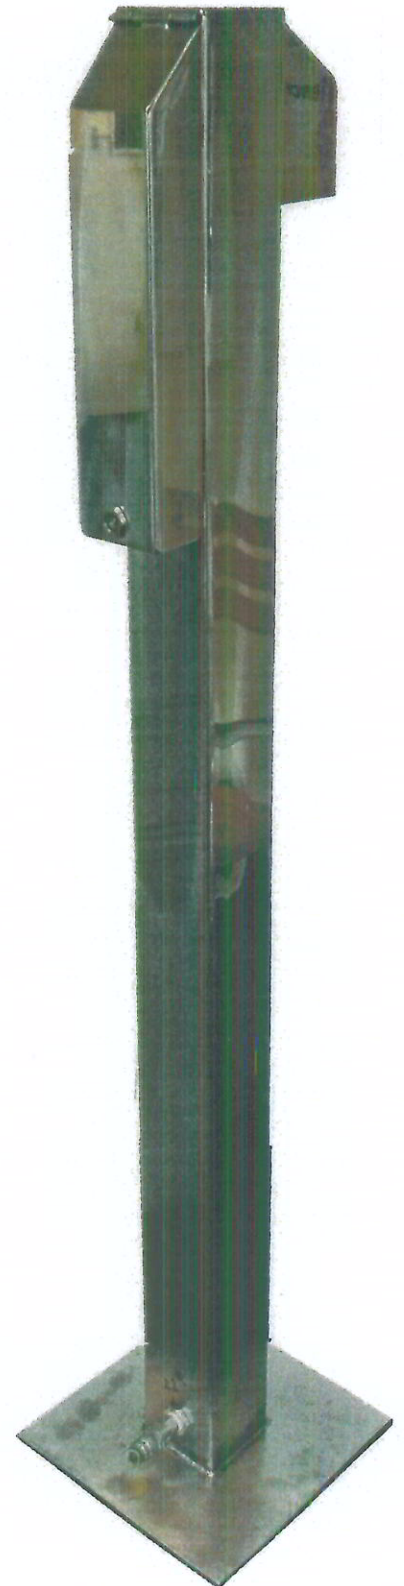

## SP7 SPECIFICATION

## MADE IN ENGLAND

MAIN BODY	316L, marine grade, Stainless steel offers total corrosion resistance
SIZE	1500mm tall, 750mm above ground, 750mm below ground
CROSS SECTION	100mm X 100mm box, 3mm wall thickness for strength
OUTLET TAP COVER	Anti contamination, fully welded
INLET SYSTEM COVER	Welded 2mm Stainless steel
HINGE	Heavy duty, fully welded stainless steel
BASE SIZE	300mm X 300mm
MAINS CONNECTION	1/2" BSP female socket
RISING MAIN	15mm copper, double check valve
FLOW REGULATOR	4-8 LPM, customer choice
OUTLET TAP	Bristan non concussive WRAS approved bib tap
STOP TAP	15mm brass full flow
DRAIN OFF TAP	Type "A" brass drain
INSULATION	19mm thick wall Class O Armaflex down to -5 deg C
FINISH	Either Mirror Polish or Satin Brushed
SECURITY	Either tamperproof drive pin catch or padlock loops
WELDING	Fully welded lid and covers by skilled and coded TIG welders

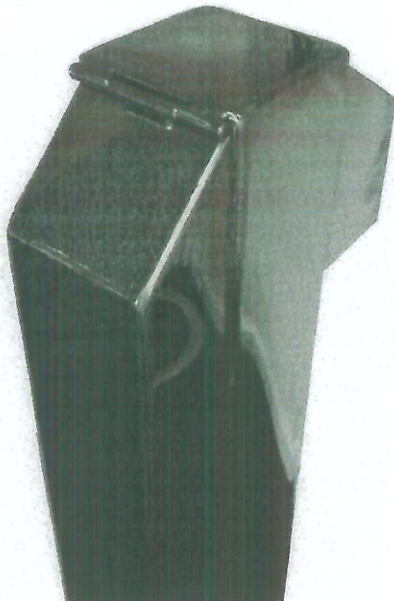

Rear; showing heavy duty hinge and mechanism cover



Front lower; showing Bristan tap and anti dog foul cover





Rear; showing mechanism under anti vandal cover with double check valve, drain valve and isolation valve before application of Armaflex insulation.

Don't forget our other models:

- SP1 "The Original"
- SP3 With Tamper proof tap cover for gardens
- SP4 Overall height 1000mm

IF IN DOUBT ASK

DO NOT SCALE

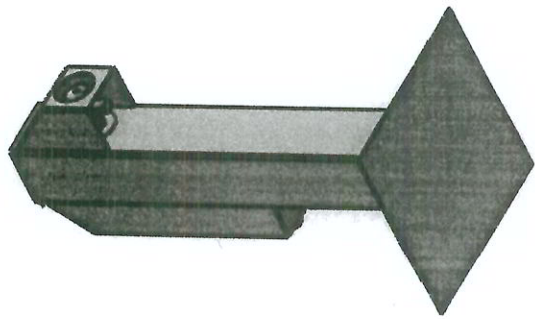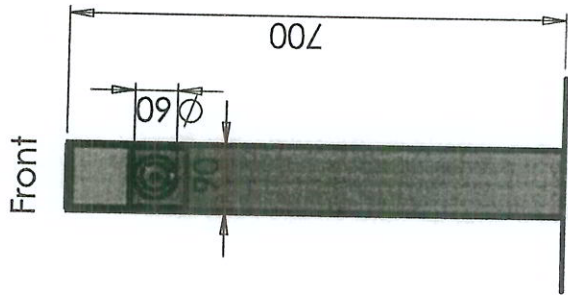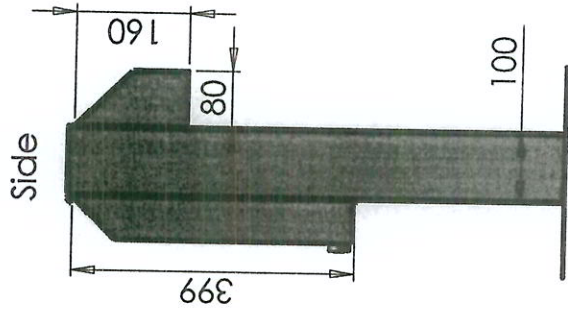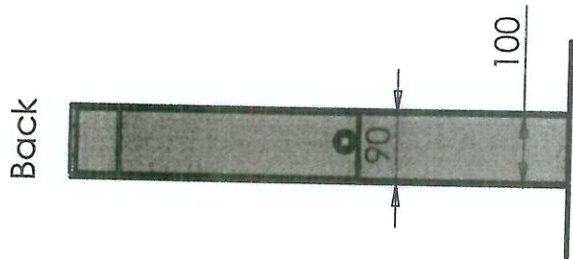

Internal

